




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: B65D 85/02, C09F 9/00, H10K	(11) International Publication Number: WO 95/03484
(52) International Filing Date: 22 September 1994 (22.09.94)	(12) International Publication Date: 30 March 1995 (30.03.95)
(53) International Application Number: PCT/US94/0771	(13) Designated States: All, EP, CA, CN, JP, KR, European patents (AT, BE, CH, DE, DK, ES, FR, GB, GR, IL, IT, LU, MC, NL, PT, SE).
(54) Priority Date: 09/12/93	(55) Priority Documents: US 08/123,456
(56) Applicant: SONY, INC. (US); 333 9th Avenue, New York, NY 10022 (US).	(57) Inventor: GARY, J. (US); 333 9th Avenue, New York, NY 10022 (US).
(58) Agent: BEATON, Glenn, R. et al.; 4501 S. Ulster Street, Denver, CO 80237 (US).	

INDICATOR DEVICE RESPONSIVE TO AXIAL FORCE

(57) Abstract

A device to indicate the application of a non-reversible force, having particular utility in monitoring the dispensing of a push-down actuated aerosol medication dispenser. A non-reversible force on an inner cover (10) is translated into a rotation of an indicator wheel (12) relative to the outer cover by a set of flexible pins (14) engaged with a set of teeth (16). The pins engage and disengage circumferentially when the applied force moves them to effect a rotation of the wheel. Flexible pins indicate the relative rotation of the teeth such as a window (18) in the outer cover through which are visible indicia on the indicator wheel. The device may also include means to reset in operation by a click.

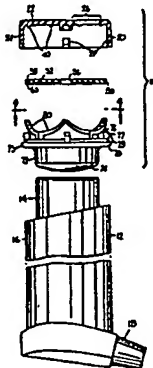

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the first page of pamphlet publishing international applications under the PCT.

AF	Algeria	AG	Angola	AI	Antigua and Barbuda
AK	Albania	AM	Armenia	AN	Antigua and Barbuda
AL	Algeria	AO	Angola	AR	Argentina
AM	Armenia	AW	Aruba	AT	Austria
AN	Antigua and Barbuda	AX	Aland Islands	AZ	Azerbaijan
AO	Angola	BA	Bahamas	BB	Barbados
AR	Argentina	BD	Bangladesh	BE	Belgium
AS	Andorra	BF	Burkina Faso	BG	Bulgaria
AT	Austria	BI	Burundi	BH	Bahrain
AU	Australia	BJ	Benin	BM	Bermuda
AW	Aruba	BN	Brunei Darussalam	BO	Bolivia
AX	Aland Islands	BR	Brazil	BS	Bahamas
AY	Asia	BT	Bhutan	BV	Bouvet Island
AZ	Azerbaijan	BZ	Belize	CA	Canada
BA	Bahamas	CC	Cocos (Keeling) Islands	CB	Cambodia
BB	Barbados	CD	Congo	CE	Czech Republic
BC	Bahamas	CF	Congo	CG	Congo
BD	Bangladesh	CH	Switzerland	CI	Cote d'Ivoire
BE	Belgium	CK	Christmas Island	CJ	Croatia
BF	Burkina Faso	CL	Chile	CM	Cameroun
BG	Bulgaria	CM	Cameroun	CN	China
BH	Bahrain	CO	Colombia	CU	Cuba
BI	Burundi	CR	Costa Rica	CV	Cape Verde
BJ	Benin	CS	Serbia and Montenegro	CY	Cyprus
BK	Belize	CT	Connecticut	CZ	Czech Republic
BL	Belize	CU	Cuba	DA	Dominican Republic
BM	Bermuda	DE	Germany	DB	Denmark
BN	Brunei Darussalam	DF	Delaware	DD	DDR
BO	Bolivia	DG	Dominican Republic	DE	Germany
BS	Bahamas	DH	Dominican Republic	DI	Dominican Republic
BT	Bhutan	DK	Denmark	DL	Dominican Republic
BV	Bouvet Island	DM	Dominican Republic	DM	Dominican Republic
BW	Botswana	DN	Dominican Republic	DN	Dominican Republic
BY	Belarus	DO	Dominican Republic	DO	Dominican Republic
BZ	Belize	DR	Dominican Republic	DR	Dominican Republic
CA	Canada	DS	Dominican Republic	DS	Dominican Republic
CB	Cambodia	DT	Dominican Republic	DT	Dominican Republic
CC	Cocos (Keeling) Islands	DU	Dominican Republic	DU	Dominican Republic
CD	Congo	DV	Dominican Republic	DV	Dominican Republic
CE	Czech Republic	DW	Dominican Republic	DW	Dominican Republic
CF	Congo	DX	Dominican Republic	DX	Dominican Republic
CG	Congo	EK	Egypt	EL	Egypt
CH	Switzerland	EM	Equatorial Guinea	EN	England
CI	Cote d'Ivoire	EO	Equatorial Guinea	EO	Equatorial Guinea
CJ	Croatia	EP	Equatorial Guinea	EP	Equatorial Guinea
CK	Christmas Island	EQ	Equatorial Guinea	EQ	Equatorial Guinea
CL	Chile	ER	Eritrea	ER	Eritrea
CM	Cameroun	ES	Spain	ES	Spain
CN	China	ET	Ethiopia	ET	Ethiopia
CO	Colombia	EU	European Union	EU	European Union
CU	Cuba	EV	Eurozone	EV	Eurozone
CV	Cape Verde	EW	Eurozone	EW	Eurozone
CY	Cyprus	EX	Eurozone	EX	Eurozone
CZ	Czech Republic	EY	Eurozone	EY	Eurozone
DA	Dominican Republic	EZ	Eurozone	EZ	Eurozone
DB	Denmark	FA	Falkland Islands	FA	Falkland Islands
DC	Dominican Republic	FB	Falkland Islands	FB	Falkland Islands
DD	DDR	FC	Falkland Islands	FC	Falkland Islands
DE	Germany	FD	Falkland Islands	FD	Falkland Islands
DF	Delaware	FE	Falkland Islands	FE	Falkland Islands
DG	Dominican Republic	FF	Falkland Islands	FF	Falkland Islands
DH	Dominican Republic	FG	Falkland Islands	FG	Falkland Islands
DI	Dominican Republic	FH	Falkland Islands	FH	Falkland Islands
DL	Dominican Republic	FI	Finland	FI	Finland
DM	Dominican Republic	FJ	Fiji	FJ	Fiji
DN	Dominican Republic	FK	Falkland Islands	FK	Falkland Islands
DO	Dominican Republic	FL	Florida	FL	Florida
DP	Dominican Republic	FM	Federated States of Micronesia	FM	Federated States of Micronesia
DQ	Dominican Republic	FO	Falkland Islands	FO	Falkland Islands
DR	Dominican Republic	FP	Falkland Islands	FP	Falkland Islands
DS	Dominican Republic	FQ	Falkland Islands	FQ	Falkland Islands
DT	Dominican Republic	FR	France	FR	France
DU	Dominican Republic	FS	Falkland Islands	FS	Falkland Islands
DV	Dominican Republic	FT	Falkland Islands	FT	Falkland Islands
DW	Dominican Republic	FU	Falkland Islands	FU	Falkland Islands
DX	Dominican Republic	FX	Falkland Islands	FX	Falkland Islands
EK	Egypt	FY	Falkland Islands	FY	Falkland Islands
EM	Equatorial Guinea	FZ	Falkland Islands	FZ	Falkland Islands
EN	England	GA	Gabon	GA	Gabon
EO	Equatorial Guinea	GB	Great Britain	GB	Great Britain
EP	Equatorial Guinea	GC	Gabon	GC	Gabon
EQ	Equatorial Guinea	GD	Grenada	GD	Grenada
ER	Eritrea	GE	Georgia	GE	Georgia
ES	Spain	GF	Gabon	GF	Gabon
ET	Ethiopia	GG	Guernsey	GG	Guernsey
EU	European Union	GH	Ghana	GH	Ghana
EV	Eurozone	GI	Guinea-Bissau	GI	Guinea-Bissau
EW	Eurozone	GJ	Guernsey	GJ	Guernsey
EX	Eurozone	GK	Guernsey	GK	Guernsey
EY	Eurozone	GL	Greenland	GL	Greenland
EZ	Eurozone	GM	Gambia	GM	Gambia
FA	Falkland Islands	GN	Guinea	GN	Guinea
FB	Falkland Islands	GO	Gambia	GO	Gambia
FC	Falkland Islands	GP	Guadeloupe	GP	Guadeloupe
FD	Falkland Islands	GQ	Guinea-Bissau	GQ	Guinea-Bissau
FE	Falkland Islands	GR	Greece	GR	Greece
FF	Falkland Islands	GS	Georgia	GS	Georgia
FG	Falkland Islands	GT	Guatemala	GT	Guatemala
FH	Falkland Islands	GU	Guam	GU	Guam
FI	Finland	GV	Guinea-Bissau	GV	Guinea-Bissau
FJ	Fiji	GW	Guinea-Bissau	GW	Guinea-Bissau
FK	Falkland Islands	GX	Guinea-Bissau	GX	Guinea-Bissau
FL	Florida	GY	Guyana	GY	Guyana
FM	Federated States of Micronesia	HA	Haiti	HA	Haiti
FO	Falkland Islands	HB	Haiti	HB	Haiti
FP	Falkland Islands	HC	Haiti	HC	Haiti
FQ	Falkland Islands	HD	Haiti	HD	Haiti
FR	France	HE	Haiti	HE	Haiti
FS	Falkland Islands	HF	Haiti	HF	Haiti
FT	Falkland Islands	HG	Haiti	HG	Haiti
FU	Falkland Islands	HH	Haiti	HH	Haiti
FX	Falkland Islands	HI	Hawaii	HI	Hawaii
FY	Falkland Islands	HJ	Haiti	HJ	Haiti
FZ	Falkland Islands	HK	Hong Kong	HK	Hong Kong
GA	Gabon	HL	Haiti	HL	Haiti
GB	Great Britain	HM	Haiti	HM	Haiti
GC	Gabon	HN	Haiti	HN	Haiti
GD	Grenada	HO	Haiti	HO	Haiti
GE	Georgia	HP	Haiti	HP	Haiti
GF	Gabon	HQ	Haiti	HQ	Haiti
GG	Guernsey	HR	Croatia	HR	Croatia
GH	Ghana	HS	Haiti	HS	Haiti
GI	Guinea-Bissau	HT	Haiti	HT	Haiti
GJ	Guernsey	HU	Hungary	HU	Hungary
GK	Guernsey	IV	Ivory Coast	IV	Ivory Coast
GL	Greenland	IS	Iceland	IS	Iceland
GM	Gambia	IT	Italy	IT	Italy
GN	Guinea	JE	Jersey	JE	Jersey
GO	Gambia	JK	Jamaica	JK	Jamaica
GP	Guadeloupe	JL	Jersey	JL	Jersey
GQ	Guinea-Bissau	JM	Jamaica	JM	Jamaica
GR	Greece	JN	Jamaica	JN	Jamaica
GS	Georgia	JO	Jordan	JO	Jordan
GT	Guatemala	JP	Japan	JP	Japan
GU	Guam	KA	Kazakhstan	KA	Kazakhstan
GV	Guinea-Bissau	KB	Kazakhstan	KB	Kazakhstan
GW	Guinea-Bissau	KC	Kazakhstan	KC	Kazakhstan
GX	Guinea-Bissau	KE	Kenya	KE	Kenya
GY	Guyana	KF	Kazakhstan	KF	Kazakhstan
HA	Haiti	KG	Kazakhstan	KG	Kazakhstan
HB	Haiti	KH	Kazakhstan	KH	Kazakhstan
HC	Haiti	KI	Kazakhstan	KI	Kazakhstan
HD	Haiti	KJ	Kazakhstan	KJ	Kazakhstan
HE	Haiti	KK	Kazakhstan	KK	Kazakhstan
HF	Haiti	KL	Kazakhstan	KL	Kazakhstan
HG	Haiti	KM	Kazakhstan	KM	Kazakhstan
HH	Haiti	KN	Kazakhstan	KN	Kazakhstan
HI	Hawaii	KO	Kazakhstan	KO	Kazakhstan
HJ	Haiti	KP	Kazakhstan	KP	Kazakhstan
HK	Hong Kong	KQ	Kazakhstan	KQ	Kazakhstan
HL	Haiti	KR	Kazakhstan	KR	Kazakhstan
HM	Haiti	KS	Kazakhstan	KS	Kazakhstan
HN	Haiti	KT	Kazakhstan	KT	Kazakhstan
HO	Haiti	KU	Kazakhstan	KU	Kazakhstan
HP	Haiti	KV	Kazakhstan	KV	Kazakhstan
HQ	Haiti	KW	Kazakhstan	KW	Kazakhstan
HR	Croatia	KX	Kazakhstan	KX	Kazakhstan
HS	Haiti	KY	Kazakhstan	KY	Kazakhstan
HT	Haiti	KZ	Kazakhstan	KZ	Kazakhstan
HU	Hungary	LA	Laos	LA	Laos
IV	Ivory Coast	LB	Lebanon	LB	Lebanon
IS	Iceland	LC	Liechtenstein	LC	Liechtenstein
IT	Italy	LD	Laos	LD	Laos
JE	Jersey	LE	Lebanon	LE	Lebanon
JK	Jamaica	LF	Laos	LF	Laos
JL	Jersey	LG	Laos	LG	Laos
JM	Jamaica	LH	Laos	LH	Laos
JN	Jamaica	LI	Liechtenstein	LI	Liechtenstein
JO	Jordan	LJ	Laos	LJ	Laos
JP	Japan	LK	Laos	LK	Laos
KA	Kazakhstan	LL	Laos	LL	Laos
KB	Kazakhstan	LM	Laos	LM	Laos
KC	Kazakhstan	LN	Laos	LN	Laos
KE	Kenya	LO	Laos	LO	Laos
KF	Kazakhstan	LP	Laos	LP	Laos
KG	Kazakhstan	LQ	Laos	LQ	Laos
KH	Kazakhstan	LR	Laos	LR	Laos
KI	Kazakhstan	LS	Laos	LS	Laos
KJ	Kazakhstan	LT	Lithuania	LT	Lithuania
KK	Kazakhstan	LU	Luxembourg	LU	Luxembourg
KL	Kazakhstan	LV	Latvia	LV	Latvia
KM	Kazakhstan	LY	Libya	LY	Libya
KN	Kazakhstan	MA	Malta	MA	Malta
KO	Kazakhstan	MC	Monaco	MC	Monaco
KP	Kazakhstan	MD	Moldova	MD	Moldova
KQ	Kazakhstan	ME	Montenegro	ME	Montenegro
KR	Kazakhstan	MF	Malta	MF	Malta
KS	Kazakhstan	MG	Madagascar	MG	Madagascar
KT	Kazakhstan	MH	Marshall Islands	MH	Marshall Islands
KU	Kazakhstan	MI	Maldives	MI	Maldives
KV	Kazakhstan	ML	Maldives	ML	Maldives
KW	Kazakhstan	MM	Myanmar	MM	Myanmar
KX	Kazakhstan	MN	Mongolia	MN	Mongolia
KY	Kazakhstan	MO	Macao	MO	Macao
KZ	Kazakhstan	MP	Marshall Islands	MP	Marshall Islands
LA	Laos	MQ	Marshall Islands	MQ	Marshall Islands
LB	Lebanon	MR	Morocco	MR	Morocco
LC	Liechtenstein	MS	Maldives	MS	Maldives
LD	Laos	MT	Malta	MT	Malta
LE	Lebanon	MU	Mauritius	MU	Mauritius
LF	Laos	MV	Maldives	MV	Maldives
LG	Laos	MW	Malawi	MW	Malawi
LH	Laos	MX	Mexico	MX	Mexico
LI	Liechtenstein	MY	Malaysia	MY	Malaysia
LJ	Laos	MZ	Mozambique	MZ	Mozambique
LK	Laos	NA	Namibia	NA	Namibia
LM	Laos	NC	New Caledonia	NC	New Caledonia
LN	Laos	NE	Niger	NE	Niger
LO	Laos	NF	Norfolk Island	NF	Norfolk Island
LP	Laos	NG	Nigeria	NG	Nigeria
LQ	Laos	NH	Norfolk Island	NH	Norfolk Island
LR	Laos	NI	Nicaragua	NI	Nicaragua
LS	Laos	NJ	New Jersey	NJ	New Jersey
LT	Lithuania	NK	Norfolk Island	NK	Norfolk Island
LU	Luxembourg	NL	Netherlands	NL	Netherlands
LV	Latvia	NO	Norway	NO	Norway
LY	Libya	NP	Nepal	NP	Nepal
MA	Malta	NQ	Norfolk Island	NQ	Norfolk Island
MC	Monaco	NR	Norfolk Island	NR	Norfolk Island
MD	Moldova	NS	Norfolk Island	NS	Norfolk Island
ME	Montenegro	NT	Norfolk Island	NT	Norfolk Island
MF	Malta	NU	Norfolk Island	NU	Norfolk Island
MG	Madagascar	NV	Norfolk Island	NV	Norfolk Island
MH	Marshall Islands	NW	Norfolk Island	NW	Norfolk Island
MI	Maldives	NX	Norfolk Island	NX	Norfolk Island
ML	Maldives	NY	New York	NY	New York
MM	Myanmar	NZ	New Zealand	NZ	New Zealand
MN	Mongolia	OA	Oman	OA	Oman
MO	Macao	OB	Oman	OB	Oman
MP	Marshall Islands	OC	Oman	OC	Oman
MQ	Marshall Islands	OD	Oman	OD	Oman
MR	Morocco	OE	Oman	OE	Oman
MS	Maldives	OF	Oman	OF	Oman
MT	Malta	OG	Oman	OG	Oman
MU	Mauritius	OH	Oman	OH	Oman
MV	Maldives	OI	Oman	OI	Oman
MW	Malawi	OJ	Oman	OJ	Oman
MX	Mexico	OK	Oman	OK	Oman
MY	Malaysia	OL	Oman	OL	Oman
MZ	Mozambique	OM	Oman	OM	Oman
NA	Namibia	ON	Oman	ON	Oman
NC	New Caledonia	OO	Oman	OO	Oman
NE	Niger	OP	Oman	OP	Oman
NF	Norfolk Island	OS	Oman	OS	Oman
NG	Nigeria	OT	Oman	OT	Oman
NH	Norfolk Island	OU	Oman	OU	Oman
NI	Nicaragua	OV	Oman	OV	Oman
NJ	New Jersey	OW	Oman	OW	Oman
NK	Norfolk Island	OX	Oman	OX	Oman
NL	Netherlands	OY	Oman	OY	Oman
NO	Norway	OZ	Oman	OZ	Oman
NP	Nepal	PA	Pakistan	PA	Pakistan
NQ	Norfolk Island	PB	Pakistan	PB	Pakistan
NR	Norfolk Island	PC	Pakistan	PC	Pakistan
NS	Norfolk Island	PD	Pakistan	PD	Pakistan
NT	Norfolk Island	PE	Pakistan	PE	Pakistan
NU	Norfolk Island	PF	Pakistan	PF	Pakistan
NV	Norfolk Island	PG	Pakistan	PG	Pakistan
NW	Norfolk Island	PH	Pakistan	PH	Pakistan
NX	Norfolk Island	PI	Pakistan	PI	Pakistan
NY	New York	PJ	Pakistan	PJ	Pakistan
NZ	New Zealand	PK	Pakistan	PK	Pakistan
OA	Oman	PL	Pakistan	PL	Pakistan
OB	Oman	PM	Pakistan	PM	Pakistan
OC	Oman	PN	Pakistan	PN	Pakistan
OD	Oman	PO	Pakistan	PO	Pakistan
OE	Oman	PP	Pakistan	PP	Pakistan
OF	Oman	PQ	Pakistan	PQ	Pakistan
OG	Oman	PR	Pakistan	PR	Pakistan
OH	Oman	PS	Pakistan	PS	Pakistan
OI	Oman	PT	Pakistan	PT	Pakistan
OJ	Oman	PU	Pakistan	PU	Pakistan
OK	Oman	PV	Pakistan	PV	Pakistan
OL	Oman	PW	Pakistan	PW	Pakistan
OM	Oman	PX	Pakistan	PX	Pakistan
ON	Oman	PY	Pakistan	PY	Pakistan
OO	Oman	PZ	Pakistan	PZ	Pakistan
OP	Oman	QA	Qatar	QA	Qatar
OS	Oman	QB	Qatar	QB	Qatar
OT	Oman	QC	Qatar	QC	Qatar
OU	Oman	QD	Qatar	QD	Qatar
OV	Oman	QE	Qatar	QE	Qatar
OW	Oman	QF	Qatar	QF	Qatar
OX	Oman	QG	Qatar	QG	Qatar
OY	Oman	QH	Qatar	QH	Qatar
OZ	Oman	QI	Qatar	QI	Qatar
PA					

additional movement is not prevented when the device is moved in the opposite direction. This allows the index to drift, often causing failure or an incorrect reading, particularly after the device has been used over a period of time.

The device of U.S. Patent 4,011,829 issued March 13, 1977 to Wachsmann, et al., attempts to provide positive locking in both directions, but because of the direction of the tooth designed to prevent movement of the index upon closure, the device may not work reliably, particularly after wearing with use. Also, the device of Wachsmann does not provide space for the ratchet teeth to slide past the engagement teeth when the device is moving in a direction wherein such teeth should disengage, which may cause unreliable operation over a period of time. Another drawback of this device is its inclusion of a complicated "child proofing" feature with the indexing feature, which makes the device quite complex. Other features of this device, such as the method of providing the lost motion drive and the requirement of a post in the middle of the elements to hold the device together, also increase its complexity.

The device of U.S. Patent 3,151,599 issued October 6, 1964 to Livingston provides positive locking in both directions, but it does so by means of very closely spaced projections that would be difficult to manufacture economically. Furthermore, this device does not provide space for the projections to move while sliding past each other when not engaged.

The device of U.S. Patent 4,666,051 issued May 19, 1987 to Trick has an indicator wheel with a serrated rim projecting above and below the plane of the wheel. The serrations engage mating serrations in upper and lower elements in order to drive the indicator mechanism. The serrations are rigid and, therefore, tend to wear excessively as they slide past

one another.

The device of European Patent Application No. 87100917.2, published July 27, 1987, by Schwab, has a cup-shaped exterior element that engages a frustoconical closure cap. The Schwab device is somewhat complicated in design and manufacture. The device of U.S. Patent 4,220,247 issued September 2, 1980 to Kramer also includes a cup-shaped exterior element which engages an inner element.

Other devices in the art include U.S. Patents 4,511,050 by Nicol; 4,365,722 by Kramer; 4,749,093 by Trick; 4,782,966 by Thackrey; 4,753,189 by Mastman; 4,705,182 by Sewel-Lewis; 4,662,520 by Griffen; 4,641,759 by Kelley; 4,634,012 by Kelley; 4,562,933 by Dennis; 4,528,933 by Allen; 4,511,050 by Nicol; 4,548,157 by Bevoyan; 4,501,370 by Kelley; 4,489,834 by Thackrey; 4,432,300 by Lyss; 4,419,016 by Zoltan; 4,405,045 by Villa-Real; 4,357,192 by Moser; 4,347,804 by Villa-Real; 4,094,408 by Ford; 3,996,879 by Walton; 3,960,713 by Carey; 3,926,326 by Grau; 3,921,566 by Fish; 3,887,099 by Gillman; 3,753,617 by Garby; 3,446,179 by Bender; 3,334,731 by Dale; 2,943,730 by Tregilgas; 2,939,597 by Greene; 2,587,147 by Guion; 498,851 by Adsit; 4,500,005 by Forrester; 3,151,599 by Livingston; 4,666,051 by Trick; 4,345,541 by Villa-Real; 4,440,306 by Van Buskirk; 2,767,680 by Lerner; 4,723,673 by Tartaglia; 2,644,453 by Brown; 4,646,936 by Frazier; 3,766,882 by Babbitt; 3,977,554 by Costa; 5,011,032 by Rollman; 5,188,251 by Kusz; 5,184,739 by Kusz; and European Patent 0 230 323 by Schwab.

It is thus apparent from a review of this art that there is a need for an improved indicator cap that operates by application of an axial rather than rotative force. Preferably, such a device should provide positive controlled movement of the index on both opening and closing of the device, while also providing an indication to the user that the index has

functioned properly each time the device is used. The basic design of such a device can also be used in other applications where it is necessary to have a record of the number of times a given event occurs.

Preferably, such a cap should have a minimum of parts, should be easily manufactured and assembled using standard injection molding and assembly methods, and should be usable with ordinary containers that are not necessarily specially designed for the cap.

SUMMARY OF THE INVENTION

The present invention is an indicator device with an indicator mechanism that advances by the application of an axial force. The device thus translates axial force into the rotation of an indicator symbol carrier in relation to a pointer or window. The device is particularly suited for use with aerosol-type medications which are administered by applying an axial force to a canister, or for use with medications that are kept in a container with a snap closure.

The advancement mechanism utilizes the axial force to move two or more elements axially in relation to one another, and this relative axial movement is transformed into a rotation of an element in relation to another element by an indicator mechanism. The invention in a preferred embodiment includes an outer cover having a top and a depending skirt attached to the top; and a driver (sometimes referred to as a retainer herein) which nests in the skirt of the outer cover. The invention also includes a rotational mechanism which may be separate from the outer cover and driver. In the preferred embodiment, there is an indicator wheel which nests in the skirt of the outer cover between the driver and the outer cover. The driver has several lugs which mate with several notches in the radially inner surface of the outer cover to

hold the assembly together. The notches allow a measure of movement of the lugs in the axial direction, so that there is some play between the driver and the outer cover in the axial direction. The indicator wheel has a set of teeth on one side which engage a set of flexible angled pawls on the driver, and a set of teeth on the other side which engage a set of outer cover teeth on the other side. When an axial force is applied urging the outer cover and driver together, the outer cover and driver move toward one another slightly as the driver lugs move axially in the outer cover notches. The angled pawls in the driver flex toward the driver or "flatten out", which causes the driver pawl ends to shift slightly around the axis of the driver. This shift of the driver pawl ends, which are engaged with the indicator wheel teeth, drives the indicator wheel so as to rotate the indicator wheel relative to the driver. The rotation of the indicator wheel relative to the driver also results in rotation of the indicator wheel relative to the outer cover, since the engagement of the driver lugs with the outer cover notches ensure that the driver and outer cover are rotatively fixed.

The side of the indicator wheel that is against the outer cover has indicia which are viewable through a window in the outer cover to indicate the progressive rotation of the indicator wheel as the axial force urging the outer cover and driver together is repeatedly applied. The indicia may be in the form of a sequence of numbers or, in the preferred embodiment, a spiral line or pattern which produces a "gauge" when viewed through the outer cover window which appears to decline as the device is used repeatedly so as to progressively rotate the indicator wheel in relation to the outer cover. In this way, a record is kept of the total number of doses administered so that the user has some indication of whether an aerosol medication

-7-

canister, for example, is being used up.

Alternatively, the indicia on the indicator wheel may be numbers or symbols that record or limit the number of doses in a day, or words such as "empty" or "full".

When the axial force urging the outer cover and driver together is released, the driver pawls push the outer cover and driver apart. This allows the driver pawl ends to flex away from the driver and rotatively in the opposite rotative direction from the direction of rotation when the axial force was applied. This opposite rotative movement of the driver pawl ends causes the driver pawl ends to pass over a tooth of the indicator wheel, thereby "cocking" the mechanism for the next time an axial force is applied. This cocking and driving action causes the indicator wheel to advance by one tooth with each separate application of an axial force.

As explained in the preceding paragraph, the device is accomplished by the rotative movement of the driver pawl ends in relation to the indicator wheel teeth, so that the driver pawl ends pass over one of the indicator wheel teeth. During this cocking step, the indicator wheel is prevented from rotating by the engagement of the teeth that are on the opposite side of the indicator wheel with the teeth in the outer cover. Thus, the outer cover and driver do not rotate in relation to one another, and the indicator wheel rotates in relation to both a single direction but not in the opposite direction. The engagement of the driver pawls with the teeth on one side of the indicator wheel produces the rotation of the indicator wheel in that single direction, while the engagement of the outer cover teeth with the teeth on the opposite side of the indicator wheel prevents rotation of the indicator wheel in the opposite direction.

The invention thus provides a system to indicate the administration of medication through a

-8-

medication container which is accessed by the application of an axial force, such as a canister-contained aerosol, or a snap closure or a "push-and-turn" type child-resistant closure on a vial for pills or capsules. In the case of a canister, the driver may be attached directly to the canister end with an adhesive or double-sided tape, or the driver may include a skirt which press-fits over the canister end, or the device may be attached to the canister or to a canister dispenser by other suitable means. The device may also be used in any other application in which an indication of the occurrence of an event is desired. The device is incapable of advancing without applying the requisite axial force which accesses the medication, but it advances in precise and predetermined increments when that axial force is applied.

An additional advantage to the invention is that it produces audible "clicks" to confirm that it is operating properly. When the axial force is applied to access the medication and thereby advance the indicator wheel, the indicator wheel teeth on the side adjacent the outer cover pass over the teeth of the outer cover to produce a "click" or "clicks" to confirm the advancement of the indicator wheel. When the axial force is released, the driver pawls pass over the teeth of the indicator wheel on the side adjacent the driver to produce a second "click" or "clicks" to confirm the proper "cocking" of the mechanism.

Other advantages of the invention include its simplicity of manufacture, assembly and operation, and its reliability.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded elevational view of the present invention with a canister and canister case.

FIG. 2 is a top view of the outer cover of the

-9-

invention.

FIG. 2A is a side sectional view of a portion of the outer cover of the invention.

FIG. 2B is a side sectional view of a portion of the outer cover of the invention.

FIG. 3 is a top view of the indicator wheel of the invention.

FIG. 3A is a side sectional view of a portion of the indicator wheel of the invention.

FIG. 3B is a top view of an alternate embodiment of the invention.

FIG. 3C is a side sectional view of an alternate embodiment of the invention, taken along line 3C-3C of FIG. 3B.

FIG. 3D is a side sectional view of an alternate embodiment of the invention, taken along line 3D-3D of FIG. 3C.

FIG. 3E is a partial perspective view of an alternate embodiment of a mechanism to advance the indicator wheel relative to the outer cover of the present invention.

FIG. 3F is a partial side elevation view of the elements shown in FIG. 3E.

FIG. 3G is a partial perspective view of another alternate embodiment of a mechanism to advance the indicator wheel relative to the outer cover of the present invention.

FIG. 3H is a side elevational view of the elements of FIG. 3G.

FIG. 4 is a top view of the driver of the invention.

FIG. 4A is a side sectional view of a portion of the driver of the invention.

FIG. 4B is a side sectional view of a portion of the driver of the invention.

FIG. 5 is an exploded elevational view of an alternate embodiment of the present invention with a

-10-

canister and canister case.

FIG. 5A is a side elevational view of a portion of canister and canister case used with an alternate embodiment of the invention.

FIG. 5B is a bottom view of the outer cover of the invention.

FIG. 6 is an exploded elevational view of an alternate embodiment of the present invention with a canister and canister case.

FIG. 7 is an exploded perspective view of an alternate embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

An exploded elevational view of the invention 10 together with an ordinary canister aerosol medication dispenser 12 is shown in FIG. 1. The dispenser 12 includes a canister 14 which is housed in a canister case 16. Aerosol medication is dispensed from the canister 14 by grasping the canister case 16 and applying a force urging the canister 14 toward the canister case 16 to actuate a valve (not shown) in the canister 14, to release a measured dose of medication from the canister 14 and out the canister case outlet 18. The medication administered in this manner is typically respiratory tract medication such as asthma medication, and so the canister case outlet 18 is placed into the patient's mouth as the patient inhales. The system is quite reliable and simple to operate, and so it is often operated by the patient himself without the aid of a health care professional. Aerosol medication systems such as this are well known in the art, and will not be described in detail here.

The invention 10 includes three main elements in the preferred embodiment of FIG. 1: an outer cover 20, an indicator wheel 50, and a driver 70. (While the invention is a preferred embodiment is mechanical, it should be recognized that the mechanism could be

-11-

replaced with a simple electronic button attachable to the canister which actuates upon applying the valve-actuating force.) The three elements are described in detail with reference to FIG. 1, as well as reference to FIGs. 2, 2A and 2B for the outer cover 20, FIGs. 3 and 3A for the indicator wheel, and FIGs. 4, 4A and 4B for the driver, and then the operation of the device is described with reference to the previously mentioned figures.

The outer cover includes a top 22 and an axially depending skirt 24 extending from the top. The axially depending skirt may flare radially outward slightly as it extends downward, in the manner shown, to facilitate the assembly of the device. Through the top 22 is a window 26. As better shown in FIGs. 2 and 2A, the window 26 extends radially from near the center of the top to near the perimeter, and is of a width sufficient to allow the viewing of the indicia on the indicator wheel 50 in the manner described below. The edges 28 of the window 26 may be bevelled in the manner shown to improve the aesthetics of the device, or to improve the tactile aspects of the window for use with raised or depressed indicia (or braille symbols) on the indicator wheel that can be sensed in the dark or by the sight-impaired.

Spaced around the radially inner surface of the depending skirt 24 are a set of notches 29, which are better shown in the sectional view detail of FIG. 2A. Each notch 29 includes an upper wall 30 and a flat portion 34. A retainer 32 defines the lower end of the flat portion 34, and a bevelled portion 33 extends from the retainer to the bottom of the depending skirt 24. The circumferential width of the notch is just enough to receive the lugs 76 of the driver 70 described below without allowing any significant circumferential play between the notches 29 and those lugs 76. The lugs and notches of the preferred embodiment may be replaced

-13-

direction in relation to the outer cover 20 and driver 70, while the pawl ends 86 of the driver pawls 80 and the faces 44 of the outer cover teeth 40 engage the faces 63 and 64 of the indicator wheel teeth 58 and 60 to prevent rotation of the indicator wheel 50 in the opposite direction in relation to the outer cover 20 and driver 70.

On the upper surface 52 of the indicator wheel 50 is a line 65 which extends spirally from near the central hole 56 to near the radially inner edge of the upper teeth 58, in the manner shown in FIG. 3. Preferably, the surface 66 on one side of the line is one color and the surface 67 on the other side of the line is a different color; for example, the surface on one side can be red and the surface on the other side may be white. As the line 65 with the differently colored surfaces 66 and 67 are presented for viewing through the window 26 of the outer cover 20 when the device is assembled, a kind of gauge results, as described in more detail below. The differing colors can be accomplished with the use of printing, painting, adhesive materials or other methods known in the art.

The driver 70 includes a circular base 72 with a bottom 74 configured to mate with the canister 14 of the canister aerosol medication dispenser 12. Such canisters typically have a concave end, and so the driver bottom on the preferred embodiment is convex as shown in FIG. 1 to mate with the canister concave end. The driver 70 is attached to the canister using a suitable driver mount such as the double-sided adhesive pad 74 shown in FIG. 1. The diameter of the base 72 is preferably about the same as the diameter of the canister 14, so that the base 72 can be pushed into the canister case 16 if necessary to actuate the canister valve. Other mounts are feasible such as a clamp or a buckle, or mounts that make the driver integral with the canister or mounts that make the device resistant

-12-

with a slot and groove or a hole and post or any other arrangement allowing axial movement of the outer cover relative to the retainer.

In the center of the bottom surface of the top portion 22 of the outer cover 20 is an axially extending hub 36 which mates with a central hole 56 of the indicator wheel 50 in the manner described below. Also on the bottom surface of the top portion 22, around the periphery which meets the depending skirt 24, are a set of outer cover teeth 40 which engage the indicator wheel teeth 58 in the manner described below. The outer cover teeth 40, better shown in the sectional detail of FIG. 2B, include a ramp 42 on one side and a face 44 on the other side which engage the indicator wheel teeth 58 to produce a ratchet effect between the outer cover 20 and the indicator wheel 50 in the manner described below.

The indicator wheel 50 is a disk-shaped element having an upper surface 52, a lower surface 54 and a hole 56 through the middle. The diameter of the disk-shaped indicator wheel 50 is such that it nests into the outer cover 20. The upper surface 52 includes a set of indicator wheel upper teeth 58 around the periphery of the upper surface 52 as better shown in FIGs. 3 and 3A, and the lower surface 54 includes a set of indicator wheel lower teeth 60 around the periphery of the lower surface 54.

The indicator wheel teeth 58 and 60 are shown best in the elevation detail of FIG. 3A. Both the teeth 58 on the upper surface 52 and the teeth 60 on the lower surface 54 include a ramp portion 61 and 62, respectively, and a face portion 63 and 64, respectively. As explained in more detail below, the ramp portion 42 of the outer cover teeth 40 and the pawl ends 86 of the driver pawls 80 ride over the ramp portions 61 and 62 of the indicator wheel teeth 58 and 60 to allow rotation of the indicator wheel 50 in one

-14-

to operation by a child. One such other mount - a press-fit mount - is described in connection with the alternate embodiment described below.

Above the base 72 on the driver 70 is an annular ring 75 which holds several elements. The annular ring 75 is preferably of a diameter greater than the diameter of the base 72 and canister 14. This ensures that the canister end is not accessible to the user, so that the user must access the medication by applying a force to the device 10 to advance the indicator wheel 50 rather than by applying the force directly to the canister and thereby bypassing the device 10.

The annular ring 75 has a set of lugs 76 protruding upwardly. As better shown in the elevational detail of FIG. 4A, each lug 76 has a lug body 77, and a lug point 78 which engages the notches 29 of the outer cover 20 in the manner described below. The lug body 77 is somewhat flexible, so that it can flex radially inward as the lugs 76 pass over the bevelled portion 33 of the outer cover notches 28 when the driver 70 is assembled into the outer cover 20. The lug body 77 and the lug point 78 are dimensioned such that there is some axial play between the driver 70 and the outer cover 20; that is, the lugs 76 may extend all the way into the notches 28 so that the top of the lug body 77 is against the top wall 30 (see FIG. 2A) of the notch 29 while the outer cover 20 and driver 70 are positioned closely together, or the lugs 76 may be partially withdrawn from the notches 28 so that the lug point 78 is against the notch retainer 32 while the outer cover 20 and driver 70 are positioned further apart.

Also extending upward from the annular ring 74 of the driver 70 is a set of driver pawls 80. Each driver pawl 80 includes a pawl base 82 and a curved flexible pawl body 84 which extends circumferentially

-15-

and upwardly to terminate in a pawl end 86, all as better shown in FIG. 4B. The pawl end 86 engages the indicator wheel lower teeth 60 in a ratcheting manner whereby the pawl end passes over the ramp portion 62 of the indicator wheel lower teeth 60.

An important aspect of this embodiment of the invention is that the flexing of the pawls 80 produces an elongation of the circumferential dimension of the pawl, as shown in the exaggerated depiction of FIG. 4B. The pawl in solid lines is relatively unflexed, while the pawl in dashed lines is relatively flexed. The unflexed position exists when the outer cover 20 and driver 70 are positioned apart, as when the driver lugs 76 are relatively withdrawn from the outer cover notches 29. In that position, the pawl end 86 is at circumferential position "A". The flexed position exists when the outer cover 20 and driver 70 are positioned together, as when the driver lugs 76 are fully positioned into the outer cover notches 29 against the notch top wall 30. In that position, the pawl end 86 is flexed downward by bending about the pawl base 82 and along the pawl body 84. The bending results in a shift in the pawl end 86 to position B, which is circumferentially spaced apart from position A. Because the pawl end 86 is engaged with the face 64 of the indicator wheel lower teeth 60 when the pawl 80 is in the relatively unflexed position corresponding to pawl end position A, the flexing of the pawl by the forcing together of the outer cover 20 and driver 70 and consequent shifting of the pawl end to position B forces the indicator wheel 50 to rotate the distance between position A and position B in relation to the driver 70. When the force between the outer cover 20 and driver 70 is removed, the pawl unflexes to drive apart the outer cover 20 and driver 70. This unflexing allows the pawl end 86 to return to position A. The indicator wheel 50, however, does not rotate back to

-17-

another or in sequence in any order. One kind of movement is the actuation of the valve of the canister 14 to release a measured amount of aerosol medication from the canister and out the outlet 18 of the canister case 16. The other kind of movement produced by the application of an axial force urging the outer cover 20 toward the canister 14 is movement within the device 10. The axial force on the outer cover moves the outer cover toward the driver 70, which causes the driver lugs 76 to shift upward in the outer cover notches 29 until the tops of the driver lugs 76 are against the upper wall 30 of the outer cover notches 29.

This second-kind of movement - the moving together of the outer cover 20 and driver 70 caused by the axial force applied to the outer cover - also depresses the driver pawls 80, the ends 86 of which are engaged by the indicator wheel lower teeth 60. This depression - or flexing - of the driver pawls, as explained above, results in a circumferential lengthening of the pawls due to the pivoting of the pawl body 84 about the pawl base 82 and along the pawl body. FIG. 4B shows an exaggerated depiction of this circumferential lengthening of the pawl 80 from the unflexed circumferential position A (where the pawl 80 is shown in solid line) to the flexed circumferential position B (where the pawl 80 is shown in dashed lines). Because the pawl end 86 is engaged with the indicator wheel lower teeth 60, this circumferential lengthening of the driver pawls 80 drives the indicator wheel through the incremental circumferential distance of position A to position B, thus producing a rotation of the indicator wheel 50 relative to the driver 70. It can be appreciated that, because the pawls are flexible, this flexing may also produce flattening of the curvature in the pawls which also tends to lengthen them. The indicator wheel lower teeth 60 and driver pawls 80 are dimensioned such that this incremental

-16-

the earlier position where it was before the flexing because the pawl end is free to ride over the ramp portion 62 of the indicator wheel lower teeth 60. Moreover, the indicator wheel is prevented from rotating back to that earlier position by the one-way ratchet effect of the outer cover teeth 40 engaged with the indicator wheel upper teeth 58 as described below.

The device 10 is preferably made by high-speed processes such as plastic injection molding. Once the molding of the three main pieces is completed, the pieces are assembled by hand or by automated assembly machines by nesting the indicator wheel 50 into the outer cover 20 and then forcing the driver lugs 76 into the outer cover notches 29, so that the driver lugs 76 are retained in the outer cover notches 29 by the notch retainer 32 bearing against the lug points 78. When the lugs 76 are positioned in the notches 29, the driver pawls 80 are slightly flexed to provide a biasing force against the indicator wheel lower teeth 60. This biasing force holds the indicator wheel 50 against the outer cover 20 to maintain engagement of the indicator wheel upper teeth 58 with the outer cover teeth 40, to maintain engagement of the pawl ends 86 with the indicator wheel lower teeth 60, and to position the outer cover 20 and driver 70 in their relatively apart position and ready for use.

After assembly, the device 10 is attached to a medicine container such as the canister 14 shown in FIG. 1 or some other canister, vial, bottle or container, by use of double-sided adhesive tape or other suitable attachment means. The attachment means may include child-resistant elements so that the device is resistant to operation by a child.

The device is operated by applying an axial force urging the outer cover 20 toward the canister 14. The application of such force produces several kinds of movements, which may occur simultaneously with one

-18-

circumferential shift is the length of a single tooth of the indicator wheel lower teeth 60.

It is noted that the rotation of the indicator wheel 50 does not translate into any rotation of the outer cover 20, because the outer cover 20 is rotationally fixed in relation to the driver 80 by the engagement of the driver lugs 76 in the outer cover notches 29.

Thus, the overall effect on the device 10 of applying an axial force urging the outer cover 20 toward the driver 70 is, one, the outer cover 20 shifts toward the driver 70 as the driver lugs 76 move upward in the outer cover notches 29 and, two, the indicator wheel 50 rotates counterclockwise in relation to the outer cover 20 and driver 70. This counterclockwise rotation of the indicator wheel 50 in relation to the outer cover 20 shifts to the window 26 of the outer cover 20 a new portion of the indicator wheel upper surface 52. With reference to FIG. 3, that new portion of the indicator wheel upper surface 52 is slightly clockwise from the upper surface 52 that was previously at the window 26. Because the upper surface 52 includes a spiral line or pattern as explained above and as shown in FIG. 3, which appears as a "gauche" when viewed through the window 26, the progressive rotational shift of the upper portion 52 viewable through the window has the effect of creating a declining or ascending line in the window. Thus, the repeated application of an axial force to the outer cover 20 gradually rotates the indicator wheel 50 to result in the appearance of a declining or ascending "gauche" in the window 26.

Referring again to the preferred embodiment of FIGs. 1-3B and 4-4B, the release of the axial force urging the outer cover 20 toward the canister 14, allows the flexed driver pawls 80 to unflex toward their natural relaxed position. This unflexing of the

-19-

driver pawls forces the outer cover 20 and indicator wheel 50 away from the driver 80, so that the driver lugs 76 move downward in the outer cover notches 29 until the lug points 78 are stopped by the notch retainers 32 (see FIGs. 4A and 2A). The unflexing of the driver pawls 80 causes the pawl ends 86 to shift back to circumferential position A from circumferential position B. However, this circumferential shifting of the pawl ends 86 as the pawls 80 unflex does not produce any rotation of the indicator wheel 50. This is because the indicator wheel lower teeth 60 have a ramp 62 on one side and a face 64 on the other side (see FIG. 3A) to produce a one-way ratchet effect. The flexing of the pawls 80 when an axial force is applied urging the outer cover 20 toward the driver 80 causes the pawl ends 86 to shift circumferentially while engaged with the face 64 to drive the indicator wheel 50 through an incremental rotational movement. However, the release of that force and the consequential unflexing of the pawls 80 and circumferential shifting back to the pawl ends 86 does not rotate the indicator wheel 50 in the opposite direction, because the pawl ends 86 simply ride over the ramp portions 62 of the indicator wheel lower teeth 60.

This rotation of the indicator wheel 50 in relation to both the outer cover 20 and driver 80 has one other important effect. As the indicator wheel 50 rotates in relation to the outer cover 20, the outer cover teeth 40 ride over the indicator wheel upper teeth 58. More specifically, the ramp portions 42 of the outer cover teeth 40 ride over the ramp portion 61 of the indicator wheel upper teeth 58. The outer cover teeth 40 and indicator wheel upper teeth 58 are dimensioned such that the circumferential shift of the pawl ends 86 from position A to position B (see FIG. 4B) in the course of one cycle of applying an axial

-20-

force urging the outer cover 20 toward the driver 80, causes the indicator wheel upper teeth 58 to shift one tooth in relation to the outer cover teeth 58. When the outer cover teeth 40 drop over the face 63 of the indicator wheel upper teeth 58 as this one-tooth shift occurs, an audible "click" results. This "click" confirms to the user that the indicator wheel has properly advanced.

The indicator wheel lower teeth 60, as mentioned above, are dimensioned such that the circumferential movement of the pawl ends 86 produced by applying or releasing an axial force to the outer cover 20, corresponds to one tooth. Therefore, the circumferential shift in the pawl ends 86 resulting from releasing the axial force on the outer cover 20, is equal to one tooth. The passing of the driver pawls 86 over the ramp portion 62 and over the face 64 of a tooth of the indicator wheel lower teeth 60, produces another audible "click". This "click", unlike the first "click" previously described, does not confirm any advancement of the indicator wheel 50, since the indicator wheel 50 does not advance at that time; rather, this "click" confirms that the driver pawls 80 have advanced by one tooth in the indicator wheel lower teeth 60, so that the driver pawls 80 will advance the indicator wheel 50 the next time an axial force is applied to the outer cover 20 to flex the driver pawls 86. Although the description above indicates that the passing of the driver pawls over a set of teeth produces a "click", it should be reorganized that actually there may be a set of several "clicks" of the four pawls to not pass over their respective teeth exactly simultaneously due to inexactness in the dimensions of the elements. Instead, there may be as many as four closely spaced "clicks".

When the axial force is released from the outer cover 20 so that the driver pawls are permitted to

-21-

unflex, the indicator wheel 50 is positively prevented from rotating back to its previous position before it was last advanced, by the engagement of the indicator wheel upper teeth 58 with the outer cover teeth 40. As described above, those sets of teeth 58 and 40 act as a one-way ratchet; rotation of the indicator wheel 50 is allowed in one direction as the ramp portion 42 of the outer cover teeth 40 ride over the ramp portion 61 of the indicator wheel upper teeth 58, but rotation of the indicator wheel 50 is prevented in the other direction by the engagement of the face 44 of the outer cover teeth 40 with the face 63 of the indicator wheel upper teeth 58.

The device 10 has been explained above in a preferred embodiment having teeth and pawls of certain elements and in certain positions. It will be apparent to those skilled in the art that some of these arrangements may be revised or reversed without departing from the scope or spirit of the invention. For example, without limitation, the teeth and pawls could be designed so that the indicator wheel advances when the force on the outer cover is released so that the outer cover and driver separate rather than when a force is applied so that the outer cover and driver come together; the pawls could be on the indicator wheel and the engaged teeth on the driver rather than the other way around; the outer cover teeth and indicator wheel upper teeth could be reversed; and the pawls could be between the outer cover and the indicator wheel rather than between the indicator wheel and driver so that the pawls are positioned on the indicator wheel upper surface or the outer cover lower surface. It will also be apparent that the pawls and teeth on the various elements could be positioned on the outer circumference extending radially outward (or the inner circumference extending radially inward in the case of a disk having a center hole), rather than

-22-

on the upper or lower surfaces extending upward or downward.

It should also be apparent from studying the drawings that the radial position of the pawls 80 is important in producing the desired amount of rotation of the indicator wheel. If the pawls are positioned toward the radially outer edge of the device, as shown in the figures, the circumferential shift in the pawl ends 86 produced by the flexing of the pawls 80 will result in a relatively small rotation of the indicator wheel. On the other hand, if the pawls are positioned to the center of the device, the same amount of circumferential shift in the pawl ends 86 produced by the flexing of the pawls 80 will result in a relatively large rotation of the indicator wheel. Also, the degree of advancement of the indicator wheel is dependent on the distance that the outer cover moves toward and away from the retainer. This also relates to the length of the pawls, since a set of long pawls used for long distances between the outer cover and retainer will produce a greater advancement while a set of short pawls will produce a lesser advancement. Of course, the degree of advancement is also dependent on the curvature of the pawls and the geometry of the arrangement.

As previously mentioned, the upper surface 56 of the indicator wheel 50 may have indicia other than a spiral line to produce a declining or ascending line when viewed through the window 26, depending on the desired use of the device. For example, if it is desired to use the device to ensure that the patient takes a prescribed dose of medicine in prescribed time periods, and no more and no less, then the indicia may include abbreviations of the days of the week (such as Sa, Su, M, Tu, W, etc. for once a day medication or Sa1, Sa2, Su1, Su2, M1, M2, etc. for twice a day medication) arranged in a circle around the top surface

-23-

56. The teeth and pawls of the device are than dimensioned and configured such that each advancement of the indicator wheel 50 produced by applying a force urging the outer cover 20 toward the driver 70, advances one symbol under the indicator wheel. Thus the indicia visible through the window 26 successively advances through Sa, Su, M, Tu, W, etc. or Sa1, Sa2, Su1, Su2, M1, M2, etc. as the device is repeatedly operated. As another example, the indicator wheel 50 upper surface 56 may have a spiral line as indicia, but the spiral may be of such a configuration, and the teeth and pawls of the device of such a configuration and dimension, that the gauge produced by the viewing of a portion of the spiral line through the window moves through its entire range based not on the contents of the medication canister but on the allowable dosage in a day or in some other chosen time period. For example, if the medication is prescribed for discretionary as-needed administration to the patient, but not more than five times a day, then the gauge would go through its entire range with five doses dispensed. Thus, by a glance at the window, the user can determine how close he or she is to the maximum daily dose. At the outset of a new day, the gauge is reset.

The spiral line on the top of the indicator wheel 50 may go through approximately 360° as shown in FIG. 3 or any angle more or less than that. If the spiral line goes through less than 360°, then of course, the gauge goes through its entire range in something less than a full revolution of the indicator wheel relative to the outer cover. Thus, it would be necessary in that instance to reset the gauge to the starting position when the gauge indicates that the canister is empty and the next canister is started. If the spiral line is more than 360°, then two or more portions of the line may be visible at the same time

-23-

the outer cover 20. Thus, when the indicator wheel 50 rotates relative to the outer cover 20, the marker 53 slides in the spiral groove 51 and stays visible in the window 26. As the marker 53 slides in the spiral groove 51, it moves radially toward the center or perimeter of the outer cover 20, thereby acting as a gauge. Of course, the marker may be painted a distinctive color to aid in distinguishing it from the background of the indicator wheel 50 visible through the window 26. Also, the tabs of the marker may be flexible so that they can deform to allow the tab to be displaced back to the start position after reaching the end position.

It should also be appreciated that the spiral line or groove described above need not be a true geometric spiral. For example, the line or groove can be configured to move rapidly toward the center when it is near the periphery, and then slowly when it is near the center of the indicator wheel 50, so that the user has ample warning when the canister is running low.

An opposite approach is shown in the exploded perspective view of FIG. 7 in which some details are omitted for clarity. This embodiment includes the already-discussed elements of a driver 70, an indicator wheel 50 and an outer cover 20. However, the driver pawls 73 are arranged in a small circle on one side of the driver 70. Rather than bearing directly against a set of teeth on the indicator wheel 50, the pawls bear against a set of teeth on the bottom of a reduction wheel 71. The reduction wheel 71 has a set of reducing teeth 73 around its perimeter which engage a toothed hub 75 on the indicator wheel 50. It can be appreciated that the rotation of the reduction wheel 71 is increased when transferred to the indicator wheel 50, by the gear ratio of those two wheels. If, for example, the gear ratio is 10 to 1 and there are 200 teeth on the bottom of the reduction wheel 71 which are

-24-

through the window, and the user may have some difficulty in ascertaining which of the line portions is the correct one corresponding to the amount of medication remaining in the canister.

On the other hand, a spiral line that goes through more than 360° has the advantage of allowing for a gauge that "moves" in lesser increments than with a spiral line of 360° or less. This may be important because there is a practical limit to the number of teeth that can be engaged with the pawls of the device. While it is feasible to mold about 240 teeth onto the indicator wheel for engagement with the driver pawls, which corresponds to the number of doses in common canister-contained aerosol medication such as asthma medication, it is not readily feasible to mold many more than 240 teeth onto a device having a convenient size. Therefore, common canister-contained medication that contains about 240 doses can be used with a device having 240 teeth so that each time the medication is administered, the indicator wheel rotates 1/240 of a full circle and the gauge declines from full to empty in one revolution of the indicator wheel. But if the canister contains, for example, 500 doses, then it is difficult to mold the necessary 500 teeth to produce a gauge that declines from full to empty in one revolution of the indicator wheel.

An approach to this problem is as shown in FIG. 3B which is a top view of the invention. The indicator wheel 50 includes a spiral groove 51 which extends more than 360° (720° in the embodiment of FIG. 3B). The spiral groove 51 receives a small marker 53, better shown in FIG. 3C taken along line 3C-3C of FIG. 3B and FIG. 3D taken along line 3D-3D of FIG. 3C. The marker 53 is a small key that slidably fits into the spiral groove at the window 26. It is restrained from falling out of the spiral groove and the window 26 by a pair of ears 55 which extend along the spiral groove 51 under

-24-

engaged one at a time by the pawls on the driver 70, then it will take 20 advances to turn the indicator wheel a complete revolution relative to the outer cover 20.

It should also be appreciated that the window of the preferred embodiment could be replaced with a hole in the outer cover and a hub in the indicator wheel extending into the hole so that it is visible through the outer cover. Then, the hub has an arrow and the outer cover has a set of symbols arranged in a circle, or vice versa. Each time the indicator wheel rotates relative to the outer cover, the arrow points to a new symbol.

It is possible to use other mechanisms to translate the axial force applied to the outer cover to a rotation of the indicator wheel relative to the outer cover, such as the mechanisms shown in FIGs. 3E and 3F. FIG. 3E shows a partial perspective view of the inside of the depending skirt 24 of the outer cover 20, looking radially outward. The inside of the depending skirt 24 includes a radially extending groove 23 which goes completely around the depending skirt 24, although only a portion of the groove 23 and the depending skirt 24 are shown in the drawing of FIG. 3E for clarity. The top of the groove 23 is bounded by an upper set of teeth 21 and a lower set of teeth 21A. Disposed in the groove 23 between the upper set of teeth 21 and the lower set of teeth 21A is at least one engaging tab 41 which extends radially outward from the indicator wheel (not shown for clarity) into the groove 23. The engaging tab may be of any suitable cross-section, and the one in FIGs. 3E and 3F is of a circular cross-section.

In operation, the force applied to the top of the outer cover 20 to release medication, serves to move the outer cover 20 and the indicator wheel 50 together. This relative movement of the outer cover 20

-27-

and indicator wheel 50 together causes the engager tab 41 of the indicator wheel to ride along a ramp of a tooth of the upper set of teeth 21. Because the ramp is at an incline, the engager tab 41 rides down the ramp, which drives the indicator wheel 50 circumferentially to result in a rotation of the indicator wheel 50 relative to the outer cover 20. When the engager tab 41 is all the way to the bottom of the ramp, the outer cover 20 and indicator wheel 50 can move no closer together and the indicator wheel 50 cannot rotate any further relative to the outer cover. Medication has now been dispensed, and the force on the outer cover is released. The outer cover 20 then moves away from the indicator wheel 50 (which movement may be assisted by a flexible pawl or other spring-like element disposed between the outer cover 20 and the indicator wheel 50). The engager tab 41 moves across the width of the groove 23 and engages a ramp of a tooth of the lower set of teeth 21A. That ramp then serves to drive the engager tab 41 another increment circumferentially to effect another incremental rotation of the indicator wheel 50 relative to the outer cover 20. Thus, it can be seen that the indicator wheel 50 rotates relative to the outer cover 20 incrementally as a force is applied to the outer cover 20 and then incrementally again as the force is released from the outer cover 20. By arranging the indicia on the indicator wheel and dimensioning the teeth 21 and 21A appropriately, the device thus counts in a discernable fashion the dispensing of medication.

Yet another mechanism to translate the axial force applied to the outer cover to a rotation of the indicator wheel relative to the outer cover, is shown in FIGs. 3G and 3H. The general concept of this mechanism is similar to that shown in FIGs. 3E and 3F, in that it relies upon teeth having an inclined ramp and an engaging device which is driven

-28-

circumferentially by the ramp. FIG. 3G is a partial perspective view of the inside of the depending skirt 24 of the outer cover 20, looking radially outward. The inside surface of the depending skirt includes a rib 51 extending radially inward. For clarity, only a portion of the rib 51 and the depending skirt 24 are shown, although it will be appreciated that the rib extends all the way around the depending skirt 24. The upper side of the rib 51 includes a set of upper teeth 53 and the lower side of the rib 51 includes a set of lower teeth 53A. The indicator wheel 50 has a pair of tabs, an upper tab 57 and a lower tab 57A. The upper tab 57 extends radially outward from the indicator wheel 50 above the rib 51 and the lower tab 57A extends radially outward from the indicator wheel 50 below the rib 51.

In operation, the force applied to the top of the outer cover 20 to release medication, serves to move the outer cover 20 and the indicator wheel 50 together. This relative movement of the outer cover 20 and indicator wheel 50 together causes the lower tab 57A of the indicator wheel 50 to ride on the ramp of a tooth of the lower set of teeth 53A of the rib 51. The riding of the lower tab 57A on the ramp incrementally rotates the indicator wheel 50 relative to the outer cover 20. When the lower tab 57A reaches the bottom of the ramp of the lower set of teeth 53A, the indicator wheel 50 and the outer cover 20 cannot move together any more, and the indicator wheel 50 cannot rotate any more in relation to the outer cover 20. When the force applied to the outer cover 20 is released, the outer cover 20 and indicator wheel 50 move apart (which movement, again, may be assisted by a flexible pawl or other spring-like element disposed between the indicator wheel 50 and the outer cover 20). This moving apart causes the upper tab 57 of the indicator wheel 50 to ride on the ramp of a tooth of the upper

-29-

set of teeth 53 of the rib 51 of the indicator wheel 50. This riding of the upper tab 57 on the ramp produces another incremental rotation of the indicator wheel 50 relative to the outer cover 20.

Next described is an alternative embodiment for use with a different type of aerosol medication canister case. FIG. 5 shows the dispenser 112 with a canister case 116, a driver 170, an indicator wheel 150 and an outer cover 120. (For ease of reference, the 100-series labels of FIG. 5 generally correspond to the same labels of FIG. 1 without the first digit "1".) The canister case 116 is similar to the canister case 16 of the FIG. 1 previously described in that it has a canister case outlet 118 and a body to receive a canister 114. A key difference, however, as shown best in FIG. 5A, is that the canister case 116 extends to about the top of the canister 114 so that the top of the canister case 116 is approximately flush with the top of the canister 114. A cutout 115 is in the side wall of the canister case which is slightly larger than an ordinary index finger and another similar cutout is in the opposite side wall. To activate the device to release medication, it is necessary to place one's index finger over this cutout while applying an axial force urging the canister 114 downward into the canister case 116, so that the finger can move downward into the cutout 115 as the canister 114 moves downward. If one applies an axial force with one's finger positioned other than over the cutout 115, the upper edge of the canister case 116 will take the force, and the canister 114 will not properly descend into the canister case 116 to activate the internal valve to release a jet of the medication or to actuate the mechanism to advance the indicator wheel.

The driver 170 includes a skirt 172. Spaced around the inside surface of the skirt 172 is a set of several bumps 175 a having a thickness such that the

-30-

skirt 172 can be snugly press-fitted over the canister 114 to hold the driver 170 onto the canister 114. It should be appreciated that the driver 170 could be replaced with the adhesive mount described in connection with FIG. 1 or some other mount and, likewise, the adhesive mount of FIG. 1 could be replaced with the press-fitted mount of FIG. 5.

Like the driver 70 of FIG. 1, the driver 170 of FIG. 5 includes an annular ring 175 above the base 172, with a set of upwardly protruding lugs 176. Each lug has a flexible lug body 177, a lug point 178 and a set of curved, flexible, upwardly extending pawls 180, all of which are essentially the same as in the embodiment of FIG. 1.

The indicator wheel 150 of the embodiment of FIG. 5 is essentially the same as the indicator wheel 50 of the embodiment of FIG. 1. It includes a top surface 152, a lower surface 154, a hole 156 through the middle, a set of upper surface teeth 158, and a set of lower surface teeth 160.

The outer cover 120 of the embodiment of FIG. 5 is somewhat similar to the outer cover 20 of the embodiment of FIG. 1, in that there is a roughly circular top 122, with a window 126 therethrough, an axially depending skirt 124 and a set of notches 129 spaced around the interior surface of the skirt 124. The axially depending skirt 124 differs from the axially depending skirt 24 of FIG. 1 in that the axially depending skirt 124 of the present embodiment is longer and includes a set of child resistant lugs 121 spaced around the radially inner surface thereof.

The child resistant lugs 129 are better shown in FIG. 5B, taken along line 5B-5B of FIG. 5. As can be appreciated from FIG. 5B, the child resistant lugs are not spaced equally, but instead there is a pair on one side and another pair on the opposite side. The two pairs of child resistant lugs 121 are spaced such

-31-

that one pair can descend into the cutout 115 in the sidewall of the canister case 116 when the canister is depressed if that pair is centered over the cutout 115. At the same time, of course, the other pair descends into the cutout in the opposite sidewall. However, if the two pairs of child resistant lugs 121 are not centered over the cutouts, then the canister cannot be depressed to activate the valve in the canister case to release a jet of medication, because the child resistant lugs 121 will abut against the top of the canister case 116. Thus, to render the system child resistant, the device 110 is rotated along with the attached canister 114 a non-integral multiple of 180° after it is used so that the two pairs of child resistant lugs 121 are not aligned over the cutouts 115. The next time it is used, the device 110 along with the attached canister 114 must be rotated to re-align the pairs of child resistant lugs over the two cutouts 115. Only then can the device 110 descend over the canister case 116 while the child resistant lugs 121 descend into the cutouts 115. To tell the user when the pairs of child resistant lugs 121 are properly aligned over the cutouts 115 so that medication can be dispensed, there may be aligning arrows or other indicia (not shown) on the device 110 and the canister case 116.

Next described is yet another alternative embodiment for use with still another aerosol medication canister case. FIG. 6 shows the dispenser 212 with a canister case 216, a driver 270, an indicator wheel 250 and an outer cover 220. The canister case 216 is a well known design in the art that is quite different from the canister cases 16 of FIG. 1 and 116 of FIG. 5 previously described. The canister case 216 includes a canister holder 227 and an aerosol chamber 217 with a dispensing mouth 218. The aerosol chamber 217 is a hollow cylinder which receives

-32-

the canister holder 227 so that the entire canister case 216 collapses neatly into a package roughly the size of the aerosol chamber 217 when not in use. The canister case 216 includes a slot 221 in its lower portion which receives a tab 219 in the aerosol chamber 217. The canister case 216 also includes a longitudinal rib 223 which engages a notch 225 in the aerosol chamber 217 when the device is readied for use as explained below.

To use the device, the canister holder 227 is telescoped out of the aerosol chamber 217. The canister holder 227 and aerosol chamber 217 are hinged to a right angle as shown in FIG. 6 by rotating the aerosol chamber tab 219 in the canister holder slot 221, and the right angle arrangement is secured by allowing the canister holder rib 223 to engage the aerosol chamber notch 225. As mentioned above, the canister case 216 of the type shown in FIG. 6 is well known in the art and is in common use, and therefore it is not described in any additional detail here.

The invention 210 of FIG. 6 is essentially identical to the invention 110 of FIG. 5, in including a driver 270, an indicator wheel 250 and an outer cover 220, each of the same design as the driver 170, indicator wheel 150 and outer cover 120 of FIG. 5. (For ease of reference, the 200-series labels of FIG. 6 generally correspond to the 100-series labels of FIG. 5, wherein the last two digits are the same and the first digit is a "1" in FIG. 5 and a "2" in FIG. 6.)

The invention 210 is attached to the canister 214 by press-fitting the driver 270 onto the end of the canister 214 in the same manner as in the embodiment of FIG. 5. As can be seen in FIG. 6, the canister holder 218 includes a cutout 233 on one side and another cutout (not shown) on the other side. Like the cutout 115 of FIG. 5, the cutout 233 of FIG. 6 is designed to accommodate the user's finger when the canister 214 is

-33-

depressed into the canister holder 227 to activate the internal valve to release a jet of medication. In the inventions of FIG. 5 and FIG. 6, however, that cutout is used to render the device child resistant. A set of two pairs of lugs 221 are on the interior surface of the skirt 224 of the outer cover 220. If each pair of lugs 221 is centered over a cutout 233, then the interior valve may be actuated to release medication by depressing the invention 210 downward toward the canister holder 227 so that the outer cover skirt 224 passes over the top of the canister holder 227 as each pair of lugs 224 descends into a cutout 233. However, if each pair of lugs 224 is not so centered over a cutout 233, then any attempt to actuate the internal valve to release a jet of medication, or to advance the indicator wheel by actuating the indicator mechanism, will be blocked by the lugs 224 abutting against the top of the canister holder 227. Thus, the device is rendered child resistant because the user must be certain that there is proper alignment between the invention 210 and the canister holder 216 (such as by lining up alignment marks that are not shown). This is an action that cannot normally be accomplished by young children.

Another means for making the device child-resistant involves the length of the depending skirt 224 of the outer cover 20. As explained above, the canister holder 227 telescopes out of the aerosol chamber 217 and then hinges to a roughly right angle to dispense medication. After the medication is dispensed, the canister holder 227 is collapsed back into the aerosol chamber 217. However, even in the collapsed state, medication can be dispensed by the user or by a child if the dispenser does not include the indicator device of the present invention, by simply pressing the end of the canister 214. This can be prevented by using the indicator device of the

-34-

present invention and lengthening the depending skirt 224 to such an extent that it abuts against the end of the aerosol chamber 217 when the canister holder 227 is collapsed into the aerosol chamber 217, so that any force applied to the outer cover 220 is resisted by the aerosol chamber 217 and not transferred to the canister 214 to dispense medication. When the device is readied for use, the canister holder 227 is telescoped out of the aerosol chamber 217 and hinged to a right angle thereto, so that the outer cover skirt 224 no longer abuts against the end of the aerosol chamber 217, to allow a force applied to the outer cover 229 to be transferred to the canister 214 to actuate the internal valve and release the medication.

-35-

CLAIMS

What is claimed is:

1. An indicator device, comprising: an outer cover; an indicator engaged with the outer cover; and a rotation mechanism engaged with the outer cover and indicator to translate a non-rotative force on the outer cover into a rotation of the indicator relative to the outer cover; one of the outer cover and indicator having an indicia and the other of the outer cover and indicator having an indicia selector to select said indicia such that the indicia selector moves relative to the indicia when the indicator rotates relative to the outer cover.

2. The device of claim 1, wherein said rotation mechanism includes at least one pawl and a set of pawl-engaging teeth, whereby the flexing of the pawl drives the teeth to rotate the indicator wheel relative to the outer cover.

3. The device of claim 2, further comprising a retainer nested in the outer cover depending skirt such that the indicator wheel is disposed between the outer cover top portion and the retainer.

4. The device of claim 3, wherein the outer cover can be moved axially a limited amount relative to the retainer.

5. The device of claim 4, wherein one of the outer cover and the retainer includes a set of notches and the other of the outer cover and retainer includes a set of lugs slidably positioned in the notches to allow limited movement of the outer cover and retainer toward and away from one another.

6. The device of claim 5, wherein the lugs include a body and a lip such that the lugs are deformable to snap into the notches and are retained in the notches by the lip.

7. The device of claim 3, wherein the pawls have a teeth-engaging end engaged with the pawl-

-36-

engaging teeth and the pawls are configured such that a deformation of the pawls produces a circumferential shift of the teeth-engaging end to rotate said pawl-engaging teeth.

8. The device of claim 7, wherein the pawls extend circumferentially and away from the teeth-engaging end.

9. The device of claim 8, wherein the pawls are on one of the outer cover and indicator wheel and the pawl-engaging teeth are on the other of the outer cover and indicator wheel.

10. The device of claim 9, wherein the rotation mechanism includes a spring urging the pawl and pawl-engaging teeth apart.

11. The device of claim 10, wherein said spring is the pawl.

12. The device of claim 9, wherein one of the indicator wheel and retainer includes a ratchet and the other of the indicator wheel and retainer includes a set of ratchet-engaging teeth allowing rotation of the indicator wheel relative to the retainer in a first direction but not in a second direction opposite the first direction.

13. The device of claim 9, wherein the pawls are on one of the indicator wheel and the retainer and the pawl-engaging teeth are on the other of the indicator wheel and the retainer.

14. The device of claim 8, wherein the rotation mechanism includes a spring urging the pawl and pawl-engaging teeth apart.

15. The device of claim 14 wherein said spring is a pawl.

-37-

16. The device of claim 14, wherein one of the outer cover and indicator wheel includes a ratchet and the other of the outer cover and indicator wheel includes a set of ratchet-engaging teeth allowing rotation of the indicator wheel relative to the outer cover in a first direction but not in a second direction opposite the first direction.

17. The device of claim 2, wherein said rotation mechanism includes a first ramp and a ramp engager whereby said non-rotative force applied to the outer cover causes the ramp engager to slide along the first ramp to rotate the indicator wheel relative to the outer cover.

18. The device of claim 17, whereby said first ramp is on one of the outer cover and the indicator wheel and said ramp engager is on the other of the outer cover and indicator wheel.

19. The device of claim 18, wherein said rotation mechanism further includes a second ramp engageable with said ramp engager, whereby a release of the non-rotative force applied to said outer cover causes the ramp engager to slide along the second ramp to further rotate the indicator wheel relative to the outer cover.

20. The device of claim 19, wherein the first ramp includes a set of first ramp teeth, each first tooth having a ramp portion, and the second ramp includes a set of second ramp teeth, each second ramp tooth having a ramp portion, the second ramp teeth being separated from the first ramp teeth by a space and the ramp engager is a tab disposed in said space.

21. The device of claim 18, further comprising a retainer nested in the outer cover depending skirt such that the indicator wheel is disposed between the outer cover top portion and the retainer.

22. The device of claim 21, wherein one of the outer cover and the retainer includes a set of notches

-38-

and the other of the outer cover and retainer includes a set of lugs slidably positioned in the notches to allow limited movement of the outer cover and retainer toward and away from one another.

23. The device of claim 22, wherein the lugs include a body and a lip such that the lugs are deformable to snap into the notches and are retained in the notches by the lip.

24. The device of claim 23, wherein the rotation mechanism includes a spring urging the first ramp and ramp-engager apart.

25. The device of claim 24, wherein one of the indicator wheel and retainer include a ratchet and the other of the indicator wheel and retainer includes a set of ratchet-engaging teeth allowing rotation of the indicator wheel relative to the retainer in a first direction but not in a second direction opposite the first direction.

26. The device of claim 24, wherein one of the outer cover and indicator wheel includes a ratchet and the other of the indicator wheel and outer cover includes a set of ratchet-engaging teeth allowing the rotation of the indicator wheel relative to the retainer in a first direction but not in a second direction opposite the first direction.

27. The device of claim 2, wherein the outer cover top portion includes a window and the indicator wheel includes indicia selectively visible through the window.

28. The device of claim 27, wherein the window extends in a direction generally from a center of the top portion toward a perimeter of the top portion.

29. The device of claim 28, wherein the indicia on the indicator wheel include a spiral line, a portion of the spiral line being visible through the window, whereby rotation of the indicator wheel relative to the outer cover causes the spiral line

-39-

portion that is visible through the window to move in relation to the window.

30. The device of claim 29, wherein the spiral line has one color on one side and a different color on the other side.

31. The device of claim 28, further comprising a marker slidably mounted on one of the outer cover and the indicator wheel whereby the marker slides as the indicator wheel rotates in relation to the outer cover.

32. The device of claim 31, wherein the indicator wheel includes a mount on which the marker is slidably mounted, the mount being on a side of the indicator wheel adjacent the outer cover top portion and extending in a spiral pattern so that the marker can slide on the indicator wheel in a spiral pattern, and the marker being restrained from rotation relative to the outer cover but being allowed to move radially relative to the outer cover, so that the radial position of the marker relative to the outer cover moves as the indicator wheel rotates in relation to the outer cover.

33. The device of claim 32, wherein the outer cover top portion includes a window extending generally in a direction from the top portion center toward a perimeter, the window having a frame, and the marker being visible through the window and being restrained from rotation relative to the outer cover by said frame.

34. The device of claim 32, wherein said spiral mount extends more than 360° around the indicator wheel side adjacent the outer cover top portion.

35. A device to indicate the release of aerosol medication from a canister wherein aerosol medication is released from the canister by applying a force to the canister, comprising a dispenser including a canister case for holding the canister and an indicator which advances upon the application of said

-40-

force to indicate a release of the aerosol medication.

36. The device of claim 35, wherein the indicator includes an outer cover, an indicator wheel engaged with the outer cover, and a rotation mechanism engaged with the outer cover and indicator wheel to translate a non-rotative force on the outer cover to release aerosol medication from the canister into a rotation of the indicator wheel relative to the outer cover to indicate the release of the aerosol medication.

37. The device of claim 36, wherein the outer cover includes a top portion and a depending skirt, and the indicator wheel is nested in the depending skirt, and the indicator further includes a retainer nested in the outer cover depending skirt so that the indicator wheel is disposed between the outer cover top portion and the retainer.

38. The device of claim 37, wherein the canister includes an end and the dispenser canister case includes an opening to access said canister end, and the indicator includes a mount for mounting the indicator onto the canister end.

39. The device of claim 38, wherein the indicator mount is an adhesive pad that can be adhered to the canister end.

40. The device of claim 38, wherein the indicator mount is a recess so that the canister can be press-filled into the recess.

-41-

41. The device of claim 37, wherein the dispenser and indicator include a child resistant element to resist the releasing of aerosol medication by a child.

42. The device of claim 41, wherein the child resistant element includes at least one protrusion on one of the outer cover depending skirt and the dispenser and a protrusion-mate on the other of the outer cover depending skirt and the dispenser to mate with the protrusion to allow a force applied to the indicator to be translated to the canister only if the protrusion and protrusion mate are aligned.

43. The device of claim 42, wherein the outer cover depending skirt extends over a portion of the canister case when said force is applied to release aerosol medication and said protrusion is a protrusion on the depending skirt extending radially inward, and the protrusion mate is a cutout in said canister case, whereby the outer cover skirt is free to extend over a portion of the canister case to allow aerosol medication to be released when the protrusion is aligned with the cutout but is not free to extend over a portion of the canister case to allow aerosol medication to be released when the protrusion is not aligned with the cutout.

44. The device of claim 41, wherein the dispenser includes an aerosol chamber slidably attached to the canister case whereby the canister case slides into the aerosol chamber in a first position for storing the dispenser and the canister case slides out of the aerosol chamber in a second position for releasing aerosol medication.

45. The device of claim 44, wherein the aerosol chamber includes one end having a rim, and wherein the rim and the outer cover depending skirt are configured such that the rim abuts the depending skirt to prevent the release of aerosol medication when the

-42-

dispenser is in said first position but does not abut the depending skirt to prevent the release of medication when the dispenser is in said second position.

46. The device of claim 45, wherein the canister case has an end with an opening and the indicator device is attachable to the canister through said canister case opening, and the canister includes a release valve actuatable upon depressing the canister into the canister case, and the indicator is attachable to the canister, whereby the canister is depressed into the canister case by applying a force to the indicator, said force being resisted by the aerosol chamber rim when the dispenser is in said first position but not resisted by the aerosol chamber rim when the dispenser is in said second position.

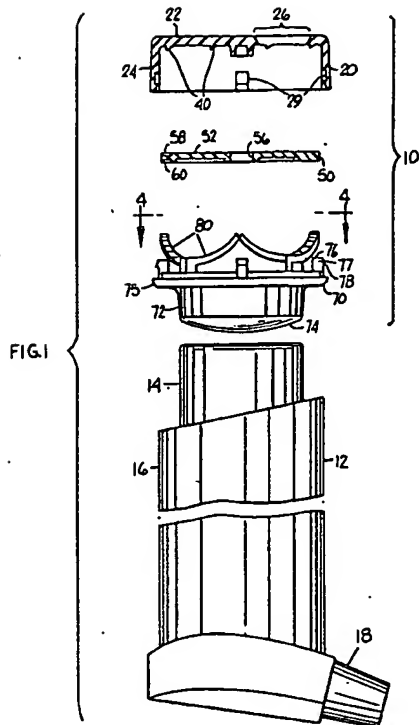


FIG. 1




FIG. 2




FIG. 2A




FIG. 2B




FIG. 3



FIG. 3A




FIG. 4A




FIG. 4




FIG. 4B




FIG. 3B




FIG. 3C




FIG. 3D




FIG. 3E




FIG. 3F




FIG. 3G




FIG. 3H




FIG. 5B




FIG. 5A

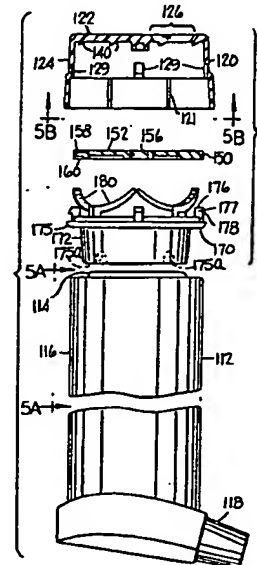


FIG. 5

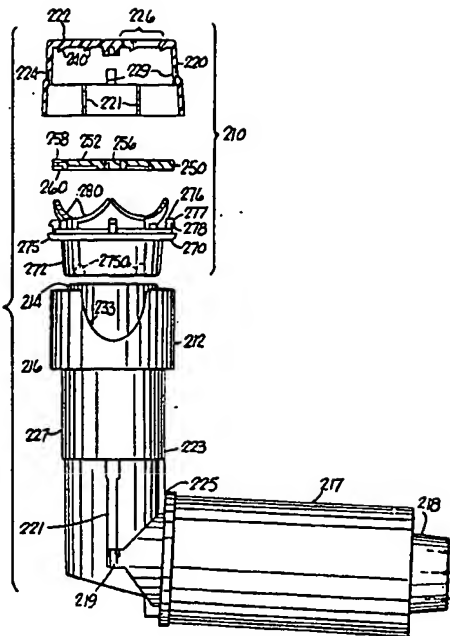


FIG. 6

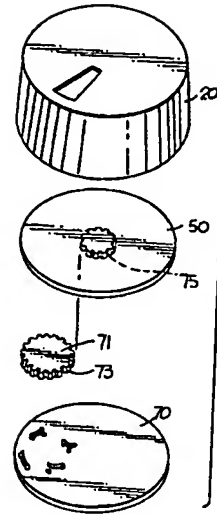


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/17721

A. CLASSIFICATION OF SUBJECT MATTER										
IPCIN : JAKS 2502; G06F 160, 1106										
US CL : 114/283; 215/238; 224/413										
According to International Patent Classification (IPC) or to both national classification and IPC										
B. FIELDS SEARCHED										
Minimum documentation searched (classification system followed by classification symbols)										
U.S. : 114/283, 208, 311, 312, 313, 314; 204/491, 492, 493; 215/238, 222/36, 37, 402, 413										
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched										
Electronic data base searched during the international search (Name of data base used, where practicable, search terms used)										
C. DOCUMENTS CONSIDERED TO BE RELEVANT										
Category	Character of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.								
X	US, A, 5,228,588 (FUCHS) 20 July 1993, see col. 4, line 54-col. 7, line 59.	1-17, 27, and 28								
X	US, A, 4,817,822 (RAND ET AL) 04 April 1989, see Figs. 3 and 4 and col. 6, lines 1-44	35-37								
A	US, A, 4,792,664 (SCHWAB) 20 December 1988									
A	US, A, 5,009,338 (BARKER) 23 April 1991									
A	US, A, 5,184,739 (KUSZ) 09 February 1993									
<input type="checkbox"/> Further documents are listed in the continuation of Part C. <input type="checkbox"/> See pages 10-11.										
Search criteria of cited documents: <table border="0"> <tr> <td> "a" documents published after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> <td> "b" documents published after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> </tr> <tr> <td> "c" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> <td> "d" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> </tr> <tr> <td> "e" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> <td> "f" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> </tr> <tr> <td> "g" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> <td> "h" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report. </td> </tr> </table>			"a" documents published after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"b" documents published after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"c" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"d" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"e" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"f" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"g" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"h" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.
"a" documents published after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"b" documents published after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.									
"c" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"d" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.									
"e" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"f" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.									
"g" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.	"h" documents published on or after the international filing date or priority date but before the publication of the international search report or before the publication of the national search report.									
Date of the cited document of the international search		Date of mailing of the international search report								
03 DECEMBER 1994		15 DEC 1994								
Name and mailing address of the ISAUS International Search and Publication PCT Washington, D.C. 20540		Authorized officer STEPHEN P. GARRIS Telephone No. (703) 205-1227								
Filing date: (703) 205-1227 Filing date: (703) 205-1227		Filing date: (703) 205-1227 Filing date: (703) 205-1227								